




IEVOLI GREY




AHTS IEVOLI GREY – P1130


THE VESSEL IS EQUIPPED AND FITTED FOR THE FOLLOWING CONTINGENCY SERVICES:

- ANCHOR HANDLING
- TOWING
- TRANSPORT PIPES FRESH WATER, DIESEL OIL, BULK CEMENT, LIQUID MUD, STORES, MATERIALS AND EQUIPMENT
- MOVE MEN AND MATERIALS BETWEEN PLATFORMS AND SHORE
- EVACUATE CASUALTIES
- EXTERNAL FIGHTING
- ANTI-POLLUTION CONTROL

MAIN DESCRIPTION

Year Built : October 2013
 Vessel built : ABG Shipyard Limited – Mumbai (India)
 Type : C  / Offshore Support Vessel - Supply - Anchor Handling / Fire Fighting ship 1 / Oil Recovery ship – fp > 60° / Unrestricted Navigation

Classification : RINA + ABS
 Additional Notes :  AUT-UMS /  DYNAPOS AM/AT R / PMS INWATERSURVEY / MON-SHAFT /  SPS Code

Port of registry : Naples Nr. 552 R.I.
 Flag : Italian
 Call Sign : IBCM
 MMSI : 247325100
 IMO Nr. : 9608788
 Certificates : RINA C  , ABS, Load Line and Tonnage Certificates (Suez), SOLAS Certificates, ISPP, IOPP, IAPP, SMC, Marpol Annex I,II,IV,V, Safety Radio Certificate, ISPS Certificate

MAIN DIMENSIONS

Design : P1130 AHTS
 Length o.a. : 72,00 m
 Length b.p.p. : 66,50 m
 Breath : 17,00 m
 Summer draught : 06,35 m
 Gross tonnage : 2995 T
 Net tonnage : 898 T

HEIGHTS from B.L.

Max : 35,00 m
 Wheelhouse Top : 22,30 m
 Bridge Deck : 19,70 m
 02 Accommodation Deck : 16,90 m
 01 Accommodation Deck : 14,10 m
 1st Deck : 11,30 m
 Main deck : 8,50 m

CARGO CAPACITY

Dead weight : 2503,4 t

DECK SPACE / STRENGTH

Length : 36,00 m
 Breath : 14,50 m
 Total : 520 m² (approx.)
 Max deck load : 900 t (approx.)
 Deck strength m² : 7,5 t/m²

TANK CAPACITY

Fuel oil : 1235 m³
 Drill water : 1229 m³
 Fresh Water (Total) : 400 m³
 Chain lockers WBT/L.M. : 246m³
 Liquid mud (brine) : 466 m³

PIPE LINE CONNECTIONS

Fuel oil : Female 4" kamlock
 Potable water : Female 4" Weco / Kamlock
 Cement : Kamlock or equal coupling with caps, female 10 cm
 Sewage : Connection to meet MARPOL 73/78
 Dirty Oil : Connection to meet MARPOL 73/78
 Liquid Mud : Female 5" Weco / Kamlock
 Drill water : Female 4" Weco / Kamlock

DRY CARGO CAPACITY

4 pressure tanks for : 235 m³
 bulk cement/barite
 Compressor capacity : 57,5 x m³/h
 Work pressure : 6,0 bar
 Discharging capacity : 50t/Hr at 50m head x 125m distance
 Pipe and manifold : Kamlock or equal coupling with caps

CARGO PUMPS

Fuel oil : 1 x 150m³/Hr at 90m head
 Drill water : 1 x 150m³/Hr at 90m head
 Potable water : 1 x 150m³/Hr at 90m head
 Brine : 1 x 75m³/Hr at 75m head
 Liquid mud : 1 x 75m³/Hr at 75m head
 Circulating L. mud : 4 x 50m³/Hr at 60m head

ENGINE AND PROPULSION

Main engines : Main Engine Wartsila 12V M26
 2 x 4000Kw at 1000 rpm
 Gear : 2 Main Gear ZF
 Propellers : Dia. 4100mm (approx.)

Variable pitch in fixed nozzels
 Tunnel thruster : - 2 Tunnel Bow Thruster
 2 x 900Kw / 1200Bhp
 - 1 Tunnel Stern Thruster
 1 x 900Kw / 1200Bhp
 Steering gear : Wills Ridley Steering
 Bollard pull : Continuous bollard pull 137 t

MANOEUVRING

Joystick : Fully Integrated, serviceable from various wheelhouse positions

AUXILIARIS

Main generator : - Shaft Generators Leroy Somer
 2 x 2000Kw
 - Diesel Generating sets
 2 x 500Kw CAT
 Port/emergency generator : - A/S Emergency Genset
 1 x 99Kw

DECK EQUIPMENT

Towing / anchor handling winch : - NORCRANE
 2 x 2940KN 5m/min.
 Static Brake capacity 400T
 Remotely Controlled from bridge
 - 1 Towing Drum,
 Capacity 1200 m / 90 mm
 - 1 Anchor Handling Drum
 Wire 1200 m / 90 mm
 - 2 Gypsies from 65mm to 100mm
 Spooling Device : 20 t Spooling Device for towing drum
 Capstan : 2 x 10T at 25m/min
 Crane : 1 x 5T at 15m
 Tugger winch : NORCRANE
 2 x 10T 32 m/min.
 Windlass : 9 tons 2 drums 2 gipsy
 Operated from bridge and locally
 Chain stoppers : Fitted
 Towing pins : SWL 400T
 Operated from bridge and locally
 Karm Fork : SWL 400T
 Operated from bridge and locally
 Stern Roller : Ø2200mm x 5500mm
 SWL 500T

NAVIGATION EQUIPMENT

2 x Radar X-band
 2 x high resolution color display
 2 x GPS: JRC JLR-7800
 1 x Navtex
 1 x Echo Sounder
 1 x Speed Log
 1 x AIS
 3 x Gyro Compasses
 1 x Magnetic Compass + 1 spare
 1 x Autopilot
 1 x Off Course Alarm

DYNAMIC EQUIPMENT

DP System Class II – NAVIS
 2 DP Operator Control Workstation (Aft)

2 Signal Processor Unit
 1 Independent Backup Joystick Control System
 2 Motion Reference Unit
 1 HIPAP Trunk
 3 Gyrocompass
 2 DGPS - Fugro Seastar
 2 Wind sensor
 2 VRU (vertical reference units)

COMMUNICATION EQUIPMENT

GMDSS Station Area A1 + A2 + A3
 - 1 HF SSB JRC
 - 1 HF DSC JRC
 - 3 VHF JRC portable
 - 2 VHF DSC JRC + 2 repeater station
 - 3 Emergency VHF
 - 1 Inmarsat C JRC
 - 1 EPIRB
 - 2 SART
 - 1 Broadband 500 data/fax/mail transfer
 - 1 Public Address System
 - 1 radiotelex

ACCOMODATION

1 man cabins, crew : 2 x 1 = 02
 1 man cabins, offers : 8 x 1 = 08
 2 man cabins, crew/offers : 14 x 2 = 28
 Hospital : 1 x 2 = 02
 Total number of bunks : = 40

FIRE FIGHTING

Fifi, class I

The fire fighting system consists of the following main components:

- 2 units seawater pumps each abt. 1500m³/Hr at 16bar
- 2 units water monitors:
 1 x foam / water
 1 x water at 1200m³/Hr
 throw length – capacity full : 160 m
 throw length – capacity reduced : 45 m
- Water Spray
- Deck Head delivery

RESCUE AND LIFESAVING EQUIPMENT




1 x Fast Rescue Boat
 Capacity: 09 persons
 Equipped with SOLAS approved davit.
 6 x Liferrafts, capacity 20 persons capacity each one
 2 x Search Light remotely controlled from bridge
 8 x Lifebuoys provided with strobe lights and lifelines
 1 x Hospital with treatment bench, racks for stretchers,
 Desk, medicine, poison locker.

This specification is subject to alteration without prior notice

MARNAVI

Ievoli Grey - P1130 AHTS

Anchor Handling Tug Supply Vessel

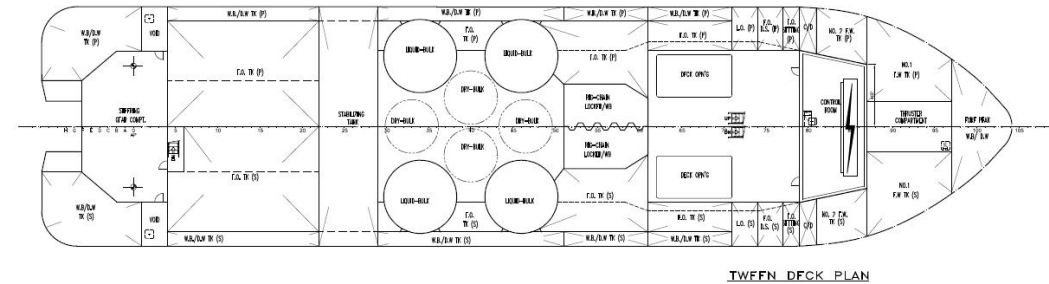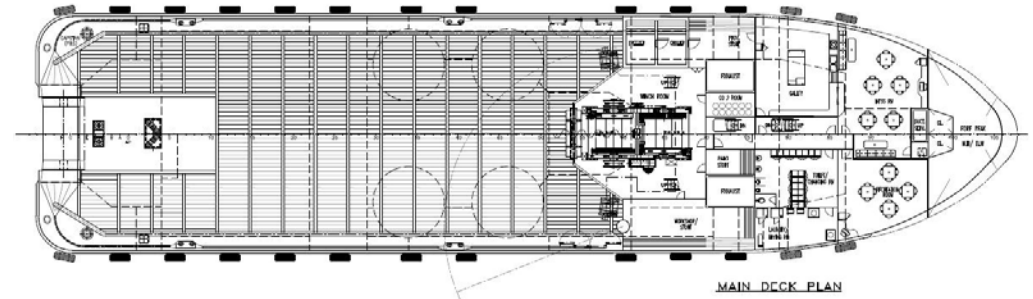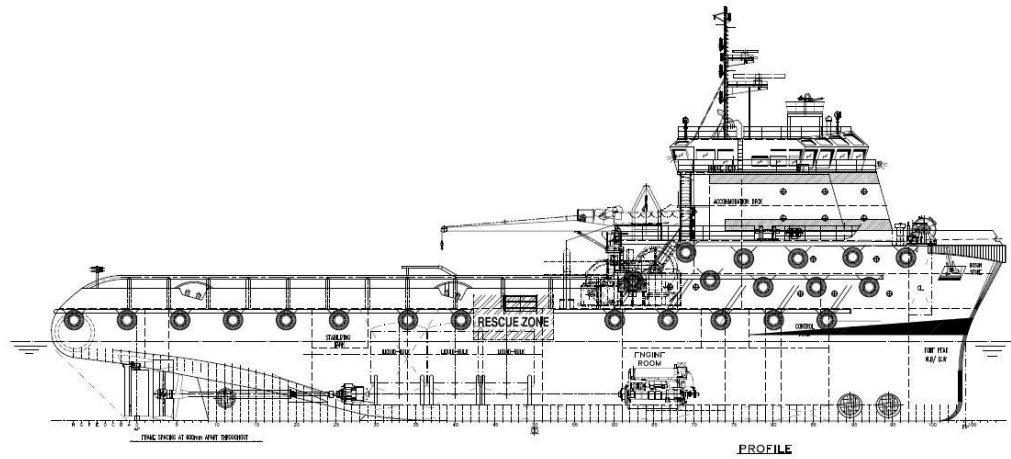

Whilst care has been taken in the preparation of this document, the data and/or information referred to herein are purely indicative and are not contractually binding. They must be checked with reference to the specific operations and are subject to change. No liability is accepted by the owners for any errors which may exist in this document.

